


## MP G120 P KR125

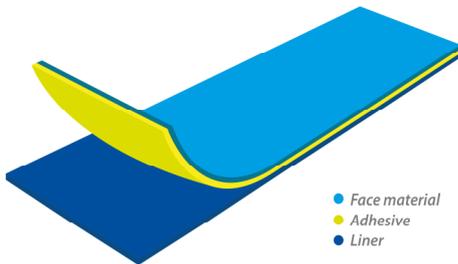

### Face material

Woodfree, one side coated label paper with high gloss.

### Adhesive

Adhesive is suitable for general use in a wide range of surfaces, which have to be clean and smooth. It has excellent initial tack on normal surfaces and good light and UV resistance. It meets the requirements of BgVV and FDA 175,105 regulations.

### Backing material

White, wood-free, one side coated siliconized paper.

Face material	Method	Units	Typical values
Grammage	ISO 536	g/m <sup>2</sup>	120
Thickness	ISO 534	μm	114
Tensile strength MD	ISO 1924-3	N/15mm	/
Tensile strength CD	ISO 1924-3	N/15mm	/
Whiteness	D65 ISO 24702	%	94 ± 2
Smoothness	Bekk	s	/
<b>Adhesive</b>			
Peel adhesion (20min, PE)	FTM1	N/25mm	7
Loop tack (glass)	FTM9	N/25mm	8
Minimum application temperature		°C	5
Service temperature range		°C	-20 do 80
<b>Backing material</b>			
Grammage	ISO 536	g/m <sup>2</sup>	125
Thickness	ISO 534	μm	129
Tensile strength MD	ISO 1924-3	kN/m	/
Tensile strength CD	ISO 1924-3	kN/m	/
Transparency		%	/
<b>Laminate</b>			
Grammage	ISO 536	g/m <sup>2</sup>	263
Thickness	ISO 534	μm	255
Low speed release force	FTM3	mN/cm	25

### Application and usage

The material is intended for all types of marking labels (labels for cans, glasses, disposable bottles), adhesive properties enable high speed processing and labeling

### Converting

Label paper offers good quality in offset printing.

### Shelf Life

Shelf life is two years in the original packaging under standard conditions (22 °C, 50% RH, without direct exposure to sunlight).

All informations are based on our experience and knowledge, they are also typical values. Products can be used for different purposes, so we recommend checking the suitability of the product before use.