


## MP LESK 80 P-34 KR125

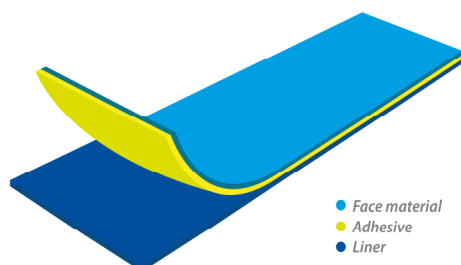

### Face material

High calendered, one side double layer clay coated kraft paper with reverse side treatment.

### Adhesive

Adhesive is suitable for general use in a wide range of surfaces, which have to be clean and smooth. It has excellent initial tack on normal surfaces and good light and UV resistance. It meets the requirements of BgVV and FDA 175,105 regulations.

### Backing material

White, wood-free, one side coated siliconized paper.

### Face material

|                     | Method        | Units            | Typical values |
|---------------------|---------------|------------------|----------------|
| Grammage            | ISO 536       | g/m <sup>2</sup> | 80             |
| Thickness           | ISO 534       | μm               | 65             |
| Tensile strength MD | ISO 1924-3    | N/15mm           | 74             |
| Tensile strength CD | ISO 1924-3    | N/15mm           | 42             |
| Whiteness           | D65 ISO 24702 | %                | /              |
| Smoothness          | Bekk          | s                | 300 min        |

### Adhesive

|                                 |      |        |           |
|---------------------------------|------|--------|-----------|
| Peel adhesion (20min, PE)       | FTM1 | N/25mm | 3         |
| Loop tack (glass)               | FTM9 | N/25mm | 6         |
| Minimum application temperature |      | °C     | 5         |
| Service temperature range       |      | °C     | -20 do 80 |

### Backing material

|                     |            |                  |     |
|---------------------|------------|------------------|-----|
| Grammage            | ISO 536    | g/m <sup>2</sup> | 125 |
| Thickness           | ISO 534    | μm               | 129 |
| Tensile strength MD | ISO 1924-3 | kN/m             | /   |
| Tensile strength CD | ISO 1924-3 | kN/m             | /   |
| Transparency        |            | %                | /   |

### Laminate

|                         |         |                  |     |
|-------------------------|---------|------------------|-----|
| Grammage                | ISO 536 | g/m <sup>2</sup> | 223 |
| Thickness               | ISO 534 | μm               | 208 |
| Low speed release force | FTM3    | mN/cm            | 25  |

### Application and usage

Material is intended for all types of marketing labels which require a good quality of print. Siliconized paper with a low tolerance of thickness of the silicone allows a very precise cutting of labels at high speeds.

### Converting

Very good results in flexo, letterpress and offset printing. It has excellent flex-crack resistance.

### Shelf Life

Shelf life is two years in the original packaging under standard conditions (22 °C, 50% RH, without direct exposure to sunlight).

All informations are based on our experience and knowledge, they are also typical values. Products can be used for different purposes, so we recommend checking the suitability of the product before use.