


## MP LESK 80 P-34 KR80

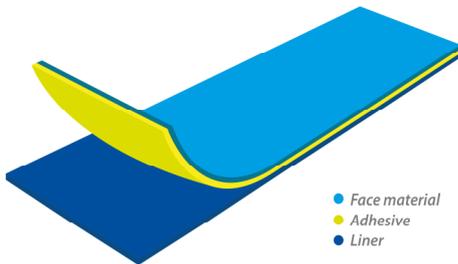

### Face material

High calendered, one side double layer clay coated kraft paper with reverse side treatment.

### Adhesive

Adhesive is suitable for general use in a wide range of surfaces, which have to be clean and smooth. It has excellent initial tack on normal surfaces and good light and UV resistance. It meets the requirements of BgVV and FDA 175,105 regulations.

### Backing material

White, wood-free, one side coated siliconized paper.

Face material	Method	Units	Typical values
Grammage	ISO 536	g/m <sup>2</sup>	80
Thickness	ISO 534	μm	65
Tensile strength MD	ISO 1924-3	N/15mm	74
Tensile strength CD	ISO 1924-3	N/15mm	42
Whiteness	D65 ISO 24702	%	/
Smoothness	Bekk	s	300 min
<b>Adhesive</b>			
Peel adhesion (20min, PE)	FTM1	N/25mm	3
Loop tack (glass)	FTM9	N/25mm	6
Minimum application temperature		°C	5
Service temperature range		°C	-20 do 80
<b>Backing material</b>			
Grammage	ISO 536	g/m <sup>2</sup>	80
Thickness	ISO 534	μm	90
Tensile strength MD	ISO 1924-3	kN/m	/
Tensile strength CD	ISO 1924-3	kN/m	/
Transparency		%	/
<b>Laminate</b>			
Grammage	ISO 536	g/m <sup>2</sup>	178
Thickness	ISO 534	μm	170
Low speed release force	FTM3	mN/cm	25

### Application and usage

Material is intended for all types of marketing labels which require a good quality of print. Siliconized paper with a low tolerance of thickness of the silicone allows a very precise cutting of labels at high speeds.

### Converting

Very good results in flexo, letterpress and offset printing. It has excellent flex-crack resistance.

### Shelf Life

Shelf life is two years in the original packaging under standard conditions (22 °C, 50% RH, without direct exposure to sunlight).

All informations are based on our experience and knowledge, they are also typical values. Products can be used for different purposes, so we recommend checking the suitability of the product before use.