


MP R COPY 80 SP12 KR80

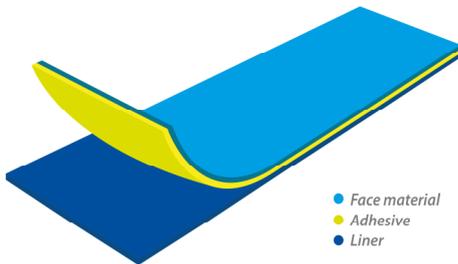

Face material

White, woodfree, one side coated, calendered paper with good mechanical properties.

Adhesive

Adhesive has increasing permanence. Within a short time after applying it on surface it can be removed and label can be reapplied. After a long time after applying the labels it can't be removed. Adhesive is in accordance with FDA 175,105 and BGW regulations.

Backing material

White, wood-free, one side coated siliconized paper.

Face material	Method	Units	Typical values
Grammage	ISO 536	g/m ²	80
Thickness	ISO 534	µm	104
Tensile strength MD	ISO 1924-3	N/15mm	/
Tensile strength CD	ISO 1924-3	N/15mm	/
Whiteness	D65 ISO 24702	%	/
Smoothness	Bekk	s	/
Adhesive			
Peel adhesion (20min, PE)	FTM1	N/25mm	2
Loop tack (glass)	FTM9	N/25mm	5
Minimum application temperature		°C	5
Service temperature range		°C	5 do 70
Backing material			
Grammage	ISO 536	g/m ²	80
Thickness	ISO 534	µm	90
Tensile strength MD	ISO 1924-3	kN/m	/
Tensile strength CD	ISO 1924-3	kN/m	/
Transparency		%	/
Laminate			
Grammage	ISO 536	g/m ²	173
Thickness	ISO 534	µm	203
Low speed release force	FTM3	mN/cm	20

Application and usage

Face paper provides good quality of printing various of techniques. It is also suitable for visas and other security papers, which require to prevent embezzlement and ensure the credibility of the data.

Converting

The label material provides excellent quality for all printing techniques, especially in offset and laser printing. Low tolerance of thickness of siliconized paper allows precise cutting, even at high speeds.

Shelf Life

Shelf life is two years in the original packaging under standard conditions (22 °C, 50% RH, without direct exposure to sunlight).

All informations are based on our experience and knowledge, they are also typical values. Products can be used for different purposes, so we recommend checking the suitability of the product before use.