


MR ARHAIK CHAMOIS 80 F GL60

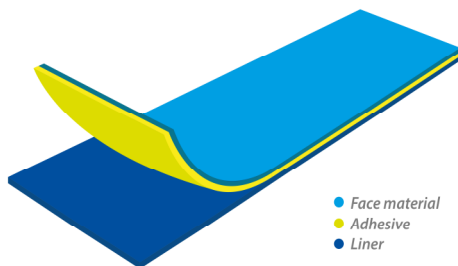

Face material

Wood-free paper with a laid ledger watermark, available in natural color (no OBA) and in very high whiteness.

Adhesive

Adhesive is suitable for refrigerated surfaces and permanence is obtained at very low temperatures. The adhesive is suitable for direct food contact.

Backing material

Yellow, smooth, calendered siliconized paper.

Face material	Method	Units	Typical values
Grammage	ISO 536	g/m ²	80
Thickness	ISO 534	µm	121
Tensile strength MD	ISO 1924-3	N/15mm	/
Tensile strength CD	ISO 1924-3	N/15mm	/
Whiteness	D65 ISO 24702	%	87 ± 2
Smoothness	Bekk	s	/
Adhesive			
Peel adhesion (20min, PE)	FTM1	N/25mm	13
Loop tack (glass)	FTM9	N/25mm	13
Minimum application temperature		°C	-5
Service temperature range		°C	-20 do 80
Backing material			
Grammage	ISO 536	g/m ²	60
Thickness	ISO 534	µm	53
Tensile strength MD	ISO 1924-3	kN/m	5,3
Tensile strength CD	ISO 1924-3	kN/m	2,2
Transparency		%	47
Laminate			
Grammage	ISO 536	g/m ²	162
Thickness	ISO 534	µm	192
Low speed release force	FTM3	mN/cm	20

Application and usage

It is used for letters, envelopes, various corporate documents, invitations and numerous other applications.

Converting

Suitable for offset, flexo and digital printing.

Shelf Life

Shelf life is two years in the original packaging under standard conditions (22 °C, 50% RH, without direct exposure to sunlight).

All informations are based on our experience and knowledge, they are also typical values. Products can be used for different purposes, so we recommend checking the suitability of the product before use.