


MR C80 OD GL60

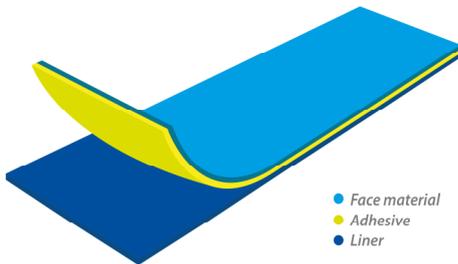

Face material

One side coated label paper that is soft calendered.

Adhesive

Generally removable adhesive, is a combination of good initial tack and good removability from most surfaces.

Backing material

Yellow, smooth, calendered siliconized paper.

| Face material | Method | Units | Typical values |
|---------------------------------|---------------|------------------|----------------|
| Grammage | ISO 536 | g/m ² | 80 |
| Thickness | ISO 534 | µm | 70 |
| Tensile strength MD | ISO 1924-3 | N/15mm | 69 (-10) |
| Tensile strength CD | ISO 1924-3 | N/15mm | 39 (-7) |
| Whiteness | D65 ISO 24702 | % | 90 |
| Smoothness | Bekk | s | / |
| Adhesive | | | |
| Peel adhesion (20min, PE) | FTM1 | N/25mm | 1,5 |
| Loop tack (glass) | FTM9 | N/25mm | 1 |
| Minimum application temperature | | °C | 0 |
| Service temperature range | | °C | -10 do 40 |
| Backing material | | | |
| Grammage | ISO 536 | g/m ² | 60 |
| Thickness | ISO 534 | µm | 53 |
| Tensile strength MD | ISO 1924-3 | kN/m | 5,3 |
| Tensile strength CD | ISO 1924-3 | kN/m | 2,2 |
| Transparency | | % | 47 |
| Laminate | | | |
| Grammage | ISO 536 | g/m ² | 158 |
| Thickness | ISO 534 | µm | 138 |
| Low speed release force | FTM3 | mN/cm | 8 |

Application and usage

Label paper offers reliable, consistent performance in various converting applications. The paper has a bright and smooth printing surface. It is used for product labeling and VIP labeling.

Converting

Basic, bulky label paper is used for improved printability with printing methods like, flexo, letterpress, offset, silk screen, thermal transfer, UV-flexo, UV-inkjet.

Shelf Life

Shelf life is two years in the original packaging under standard conditions (22 °C, 50% RH, without direct exposure to sunlight).

All informations are based on our experience and knowledge, they are also typical values. Products can be used for different purposes, so we recommend checking the suitability of the product before use.