


MR C80 P GL60

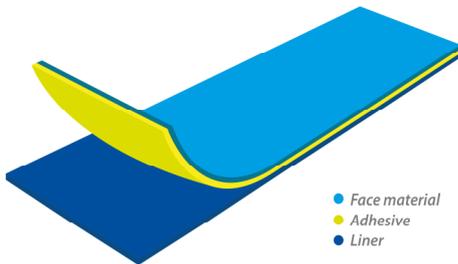

Face material

One side coated label paper that is soft calendered.

Adhesive

Adhesive is suitable for general use in a wide range of surfaces, which have to be clean and smooth. It has excellent initial tack on normal surfaces and good light and UV resistance. It meets the requirements of BgVV and FDA 175,105 regulations.

Backing material

Yellow, smooth, calendered siliconized paper.

Face material	Method	Units	Typical values
Grammage	ISO 536	g/m ²	80
Thickness	ISO 534	µm	70
Tensile strength MD	ISO 1924-3	N/15mm	69 (-10)
Tensile strength CD	ISO 1924-3	N/15mm	39 (-7)
Whiteness	D65 ISO 24702	%	90
Smoothness	Bekk	s	/
Adhesive			
Peel adhesion (20min, PE)	FTM1	N/25mm	5
Loop tack (glass)	FTM9	N/25mm	11
Minimum application temperature		°C	5
Service temperature range		°C	-20 do 80
Backing material			
Grammage	ISO 536	g/m ²	60
Thickness	ISO 534	µm	53
Tensile strength MD	ISO 1924-3	kN/m	5,3
Tensile strength CD	ISO 1924-3	kN/m	2,2
Transparency		%	47
Laminate			
Grammage	ISO 536	g/m ²	159
Thickness	ISO 534	µm	131
Low speed release force	FTM3	mN/cm	20

Application and usage

Label paper offers reliable, consistent performance in various converting applications. The paper has a bright and smooth printing surface. It is used for product labeling and VIP labeling.

Converting

Basic, bulky label paper is used for improved printability with printing methods like, flexo, letterpress, offset, silk screen, thermal transfer, UV-flexo, UV-inkjet.

Shelf Life

Shelf life is two years in the original packaging under standard conditions (22 °C, 50% RH, without direct exposure to sunlight).

All informations are based on our experience and knowledge, they are also typical values. Products can be used for different purposes, so we recommend checking the suitability of the product before use.