


## MR MET.PAP SL EP GL60

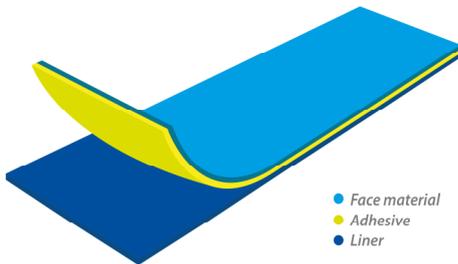

### Face material

Metallized paper specially designed for the self-adhesive label segment.

### Adhesive

Improved permanent pressure sensitive adhesive, with high initial tack, is suitable for demanding surfaces, including low energy surfaces. Adhesive is in accordance with FDA 175,105 and BGW regulations.

### Backing material

Yellow, smooth, calendered siliconized paper.

Face material	Method	Units	Typical values
Grammage	ISO 536	g/m <sup>2</sup>	83
Thickness	ISO 534	µm	70
Tensile strength MD	ISO 1924-3	N/15mm	/
Tensile strength CD	ISO 1924-3	N/15mm	/
Whiteness	D65 ISO 24702	%	/
Smoothness	Bekk	s	/
<b>Adhesive</b>			
Peel adhesion (20min, PE)	FTM1	N/25mm	7
Loop tack (glass)	FTM9	N/25mm	11
Minimum application temperature		°C	5
Service temperature range		°C	-20 do 80
<b>Backing material</b>			
Grammage	ISO 536	g/m <sup>2</sup>	60
Thickness	ISO 534	µm	53
Tensile strength MD	ISO 1924-3	kN/m	5,3
Tensile strength CD	ISO 1924-3	kN/m	2,2
Transparency		%	47
<b>Laminate</b>			
Grammage	ISO 536	g/m <sup>2</sup>	165
Thickness	ISO 534	µm	142
Low speed release force	FTM3	mN/cm	20

### Application and usage

The particular features of this paper make it ideal for manufacturing self-adhesive labels. Its properties not only ensure optimum performance in the production process of the SA complex, but also in its handling, labeling and matrix stripping.

### Converting

Especially recommended for flexo and both UV and conventional letterpress inks. It can be printed in gravure and conventional and UV offset.

### Shelf Life

Shelf life is two years in the original packaging under standard conditions (22 °C, 50% RH, without direct exposure to sunlight).

All informations are based on our experience and knowledge, they are also typical values. Products can be used for different purposes, so we recommend checking the suitability of the product before use.