


MR MUFCOPY 70 EP KR70

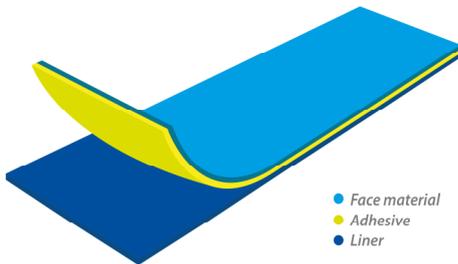

Face material

Woodfree, uncoated label paper, which has good printing and mechanical properties.

Adhesive

Improved permanent pressure sensitive adhesive, with high initial tack, is suitable for demanding surfaces, including low energy surfaces. Adhesive is in accordance with FDA 175,105 and BGW regulations. The adhesive is suitable for direct food contact.

Backing material

White, wood-free, one side coated siliconized paper.

Face material	Method	Units	Typical values
Grammage	ISO 536	g/m ²	70
Thickness	ISO 534	µm	84
Tensile strength MD	ISO 1924-3	N/15mm	/
Tensile strength CD	ISO 1924-3	N/15mm	/
Whiteness	D65 ISO 24702	%	145 ± 3
Smoothness	Bekk	s	/
Adhesive			
Peel adhesion (20min, PE)	FTM1	N/25mm	11
Loop tack (glass)	FTM9	N/25mm	8
Minimum application temperature		°C	5
Service temperature range		°C	-20 do 80
Backing material			
Grammage	ISO 536	g/m ²	70
Thickness	ISO 534	µm	78
Tensile strength MD	ISO 1924-3	kN/m	/
Tensile strength CD	ISO 1924-3	kN/m	/
Transparency		%	/
Laminate			
Grammage	ISO 536	g/m ²	158
Thickness	ISO 534	µm	176
Low speed release force	FTM3	mN/cm	20

Application and usage

The material is intended for all types of marking labels which require a good quality print.

Converting

The label material provides excellent quality for all printing techniques, especially in offset and laser printing. Low tolerance of thickness of siliconized paper allows precise cutting, even at high speeds.

Shelf Life

Shelf life is two years in the original packaging under standard conditions (22 °C, 50% RH, without direct exposure to sunlight).

All informations are based on our experience and knowledge, they are also typical values. Products can be used for different purposes, so we recommend checking the suitability of the product before use.