


## MP LESK 80 EP KR125

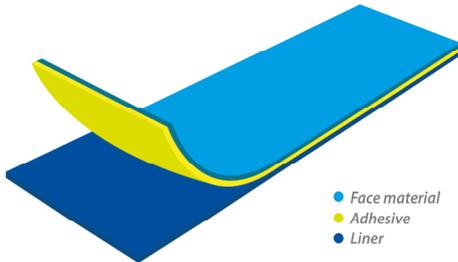

### Face material

High calendered, one side double layer clay coated kraft paper with reverse side treatment.

### Adhesive

Improved permanent pressure sensitive adhesive, with high initial tack, is suitable for demanding surfaces, including low energy surfaces. Adhesive is in accordance with FDA 175,105 and BGW regulations. The adhesive is suitable for direct food contact.

### Backing material

White, wood-free, one side coated siliconized paper.

### Face material

	Method	Units	Typical values
Grammage	ISO 536	g/m <sup>2</sup>	80
Thickness	ISO 534	µm	65
Tensile strength MD	ISO 1924-3	N/15mm	74
Tensile strength CD	ISO 1924-3	N/15mm	42
Whiteness	D65 ISO 24702	%	/
Smoothness	Bekk	s	300 min

### Adhesive

Peel adhesion (20min, PE)	FTM1	N/25mm	5
Loop tack (glass)	FTM9	N/25mm	9
Minimum application temperature		°C	5
Service temperature range		°C	-20 do 80

### Backing material

Grammage	ISO 536	g/m <sup>2</sup>	125
Thickness	ISO 534	µm	129
Tensile strength MD	ISO 1924-3	kN/m	/
Tensile strength CD	ISO 1924-3	kN/m	/
Transparency		%	/

### Laminate

Grammage	ISO 536	g/m <sup>2</sup>	225
Thickness	ISO 534	µm	210
Low speed release force	FTM3	mN/cm	25

### Application and usage

The material is intended for all types of marking labels (labels for cans, glasses, disposable bottles), adhesive properties enable high speed processing and labeling

### Converting

Very good results in flexo, letterpress and offset printing. It has excellent flex-crack resistance.

### Shelf Life

Shelf life is two years in the original packaging under standard conditions (22 °C, 50% RH, without direct exposure to sunlight).

All informations are based on our experience and knowledge, they are also typical values. Products can be used for different purposes, so we recommend checking the suitability of the product before use.