


MP STANDARD 80 P-34 KR80

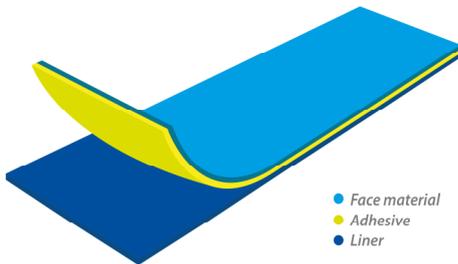

Face material

Woodfree, white, uncoated offset paper, which has good printing and mechanical properties.

Adhesive

Adhesive is suitable for general use in a wide range of surfaces, which have to be clean and smooth. It has excellent initial tack on normal surfaces and good light and UV resistance. It meets the requirements of BgVV and FDA 175,105 regulations.

Backing material

White, wood-free, one side coated siliconized paper.

Face material	Method	Units	Typical values
Grammage	ISO 536	g/m ²	80
Thickness	ISO 534	µm	100
Tensile strength MD	ISO 1924-3	N/15mm	498
Tensile strength CD	ISO 1924-3	N/15mm	538
Whiteness	D65 ISO 24702	%	101 ± 1
Smoothness	Bekk	s	30
Adhesive			
Peel adhesion (20min, PE)	FTM1	N/25mm	7
Loop tack (glass)	FTM9	N/25mm	6
Minimum application temperature		°C	5
Service temperature range		°C	-20 do 80
Backing material			
Grammage	ISO 536	g/m ²	80
Thickness	ISO 534	µm	90
Tensile strength MD	ISO 1924-3	kN/m	/
Tensile strength CD	ISO 1924-3	kN/m	/
Transparency		%	/
Laminate			
Grammage	ISO 536	g/m ²	178
Thickness	ISO 534	µm	204
Low speed release force	FTM3	mN/cm	24

Application and usage

The label material provides excellent quality for all printing techniques, which are common in the production of labels.

Converting

Label paper is suitable for good laser and inkjet printing. Low tolerance of thickness of siliconized paper allows precise cutting, even at high speeds.

Shelf Life

Shelf life is two years in the original packaging under standard conditions (22 °C, 50% RH, without direct exposure to sunlight).

All informations are based on our experience and knowledge, they are also typical values. Products can be used for different purposes, so we recommend checking the suitability of the product before use.