


## MR C80 OD-SE/WS5 GL60

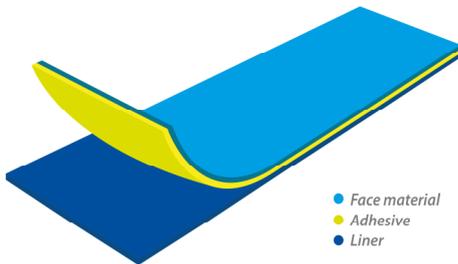

### Face material

Wood-free, one-side coated glossy paper with high mechanical resistance for converters.

### Adhesive

Adhesive with low and stable adhesion, in which, after a long period of time it can be peeled off and reapplied again. It is suitable for smooth and not too curvy surfaces.

### Backing material

Yellow, smooth, calendered siliconized paper.

Face material	Method	Units	Typical values
Grammage	ISO 536	g/m <sup>2</sup>	80
Thickness	ISO 534	μm	65
Tensile strength MD	ISO 1924-3	N/15mm	/
Tensile strength CD	ISO 1924-3	N/15mm	/
Whiteness	D65 ISO 24702	%	/
Smoothness	Bekk	s	2200 – 200 s
<b>Adhesive</b>			
Peel adhesion (20min, PE)	FTM1	N/25mm	0,2
Loop tack (glass)	FTM9	N/25mm	0,1
Minimum application temperature		°C	0
Service temperature range		°C	-10 do 40
<b>Backing material</b>			
Grammage	ISO 536	g/m <sup>2</sup>	60
Thickness	ISO 534	μm	53
Tensile strength MD	ISO 1924-3	kN/m	5,3
Tensile strength CD	ISO 1924-3	kN/m	2,2
Transparency		%	47
<b>Laminate</b>			
Grammage	ISO 536	g/m <sup>2</sup>	155
Thickness	ISO 534	μm	130
Low speed release force	FTM3	mN/cm	6

### Application and usage

Material is intended for all types of marketing labels which require a good quality of print and it is also suitable for printing on a thermal transfer printer.

### Converting

Suitable for offset and flexographic printing. Siliconized paper with a low tolerance of thickness of the silicone allows a very precise cutting of labels at high speeds.

### Shelf Life

Shelf life is two years in the original packaging under standard conditions (22 °C, 50% RH, without direct exposure to sunlight).

All informations are based on our experience and knowledge, they are also typical values. Products can be used for different purposes, so we recommend checking the suitability of the product before use.